

MS300

ULTRA-LOW POWER, ADVANCED SECURITY, HIGH SCALABILITY

The MS300 is an ARM® Cortex-M0™ based RISC Microcontroller with Hardware Security Block for embedded applications featuring a High Level of Integration and Low Power Consumption.


With its Ultra-Low Power, High Performance and Connectivity options, it is ideal for Internet of Things, Fintech Security, Smart Metering, Smart Grid, Biometric and HSM (Hardware Security Module)

KEY APPLICATIONS

- **Internet of Things**
 - Wearables & Portable
 - AMI for Smart Grid
 - Smart Medical
 - Smart Healthcare
 - Smart Automotive
 - Smart Factory
 - Smart Retail
- **Fintech Security**
 - FIDO
 - Biometric
 - Smart Payment/Banking
 - HSM

FUNCTIONAL DIAGRAM

This diagram shows the superset of features for the MS300 microcontroller.

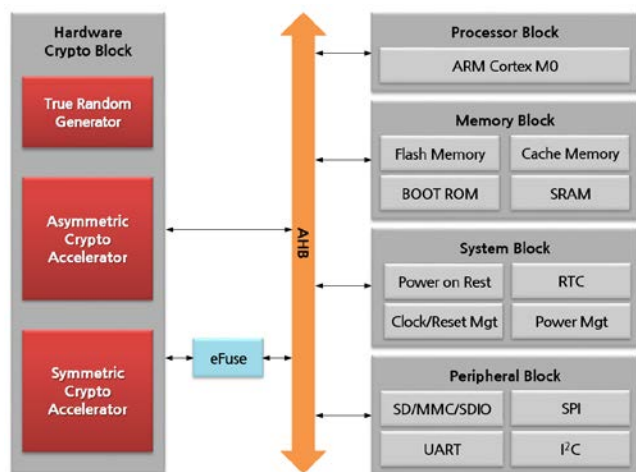

KEY FEATURES

32-BIT ARM® CORTEX™-M0 CPU

- Up to 100 MHz operation frequency.
- Built-in Nested vectored interrupt controller (NVIC) for fast deterministic interrupt processing.
- Wake-up Interrupt Controller (WIC) allows automatic wake from any priority interrupt at ultra-low power sleep mode support
- Included Instruction Cache Controller & Smart DMA Controller for increase CPU M0 performance

MEMORIES

- 64 KB SRAM
- 8 KB Boot ROM
- 8 KB Instruction Cache Memory
- 128 Byte eFuse

CRYPTO BLOCK

- Asymmetric Crypto Accelerator
 - Offloads asymmetric algorithm processing.
 - RSA used to encrypt up to 2048
 - ECC up to 512
- Symmetric Crypto Accelerator
 - AES128/256, SHA1/SHA256
 - ARIA 128/192/256
- TRNG (True Random Number Generator)
 - Designed for compliance with FIPS 140-2 and IPS 140-3 (draft).
 - High-speed operation.

INTERFACE

- Three SPI Master/Slave Interface
- Three UARTs with DMA support and full modem control
- Four I²C bus interfaces
- SDMMC card interface supporting for eMMC 4.41, SD 3.01 and SDIO 3.0 host interface
- SDIO 3.0 Slave Interface.
- Up to 41 Fast GPIO pins with configurable

SYSTEM LOGIC

- Power On Reset Logic
- Two 2-channel General Purpose Timers.
- Programmable Watchdog Timer.
- Ultra-low power RTC (Real-Time Clock)

SECURITY FUNCTION

- Secure Boot
- Secure Storage

MAIN SUPPLY VOLTAGE

- 1.8V ($\pm 10\%$) Supply Voltage
- 3.3V ($\pm 10\%$) Supply Voltage

PACKAGE INFORMATION

- 60-pin LGA
- Ball Pitch: 0.35 mm
- Package Width x Length: 6 mmx6 mm

DEVELOPMENT TOOLS

The MS300 development environment consists of a comprehensive set of development tools and software to help users implement the best solution according to their needs.

DEVELOPMENT HARDWARE TOOLS

- TBD

SOFTWARE DEVELOPMENT KITS (SDK)

- FreeRTOS

SOFTWARE DEVELOPMENT ENVIRONMENT

- GNU ARM Embedded Toolchain
- GNU ARM Eclipse

More information about MS300, development tools and technical documents, please visit <http://www.e-wbm.com> or email to info@e-wbm.com.

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent or other industrial or intellectual property right.
